

# New 1545/7 angle

**PERICOOL**<sup>®</sup>




[www.pericool.com](http://www.pericool.com)


In the left-hand graph below are given the Pericool<sup>®</sup> **1545/7** panel pressure drops, whilst on the right is to be found the Pericool<sup>®</sup> **1545/7** panel performance, in both cases as a function of the air velocity and of the panel thickness of 100, 150 or 200 mm.

This model of panel is particularly suitable where lower pressure drops but with a reasonable humidification efficiency are needed.


Pressure drop (Pa)

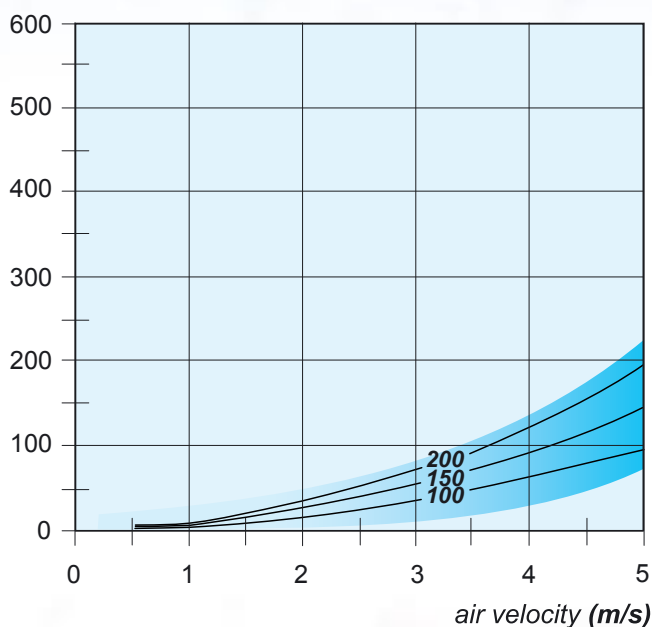

Saturation efficiency (%)

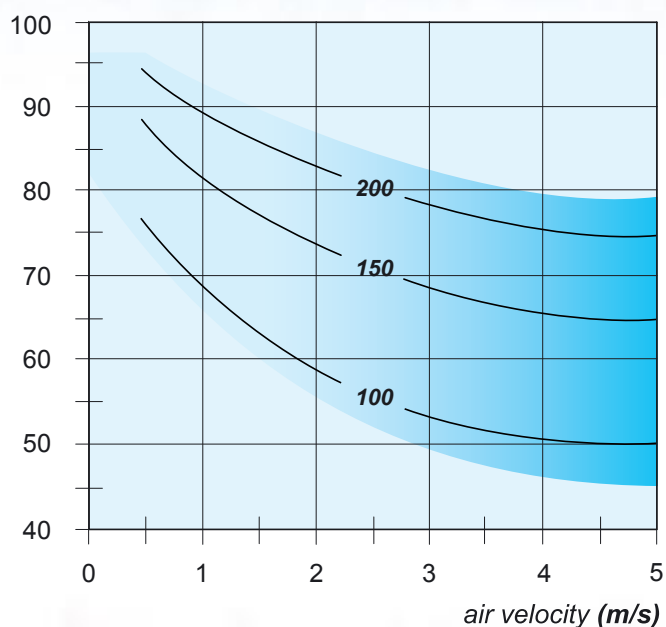

## TYPE 1545/7

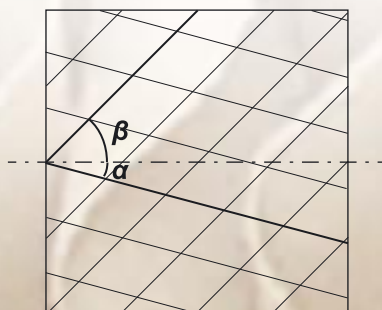

$$\alpha = 15 \quad \beta = 45$$



TERMOTECNICA PERICOLI SRL

P.o. Box 262 - 17031 Albenga (SV), Italy - Tel. +39 0182 589006 - Fax +39 0182 589005

[www.pericoli.com](http://www.pericoli.com) - [termotecnica@pericoli.com](mailto:termotecnica@pericoli.com)